




ENERG
енергия · ενεργεια




NIBE

NIBE F2040-16



55 °C

35 °C



A++


A+++




dB



61 dB



kW



kW



2019



811/2013




ENERG
енергия · ενέργεια





NIBE F2040-16 + VVM310

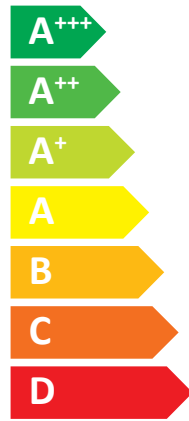

A++

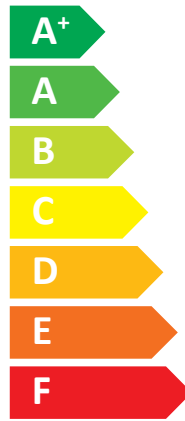

A



2019

811/2013



ENERG

енергия · ενέργεια

Y






IJA


IE


IA


NIBE


NIBE F2040-16 + VVM310









+ 

+ 

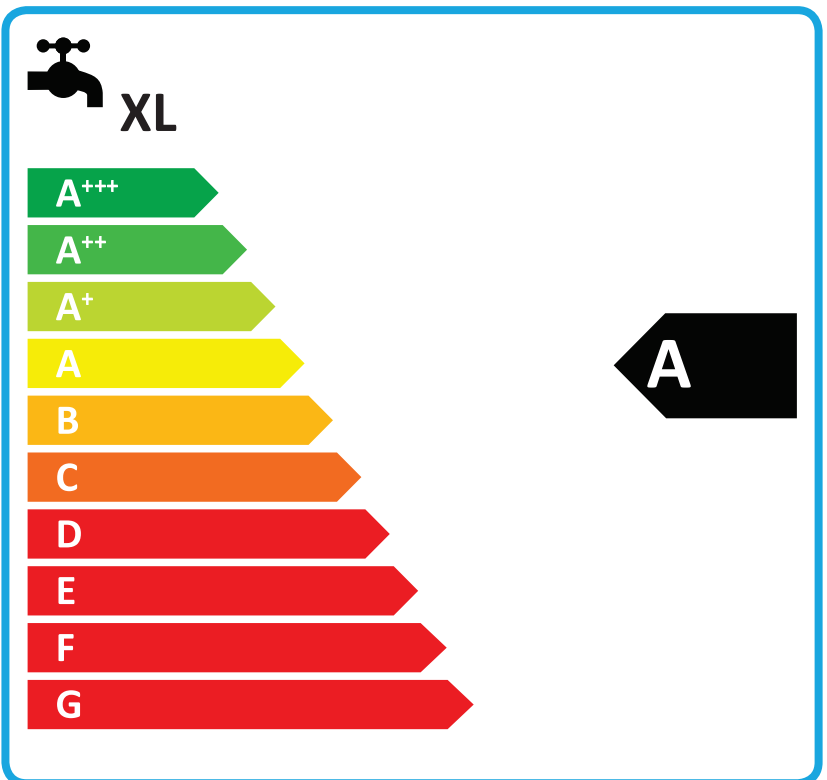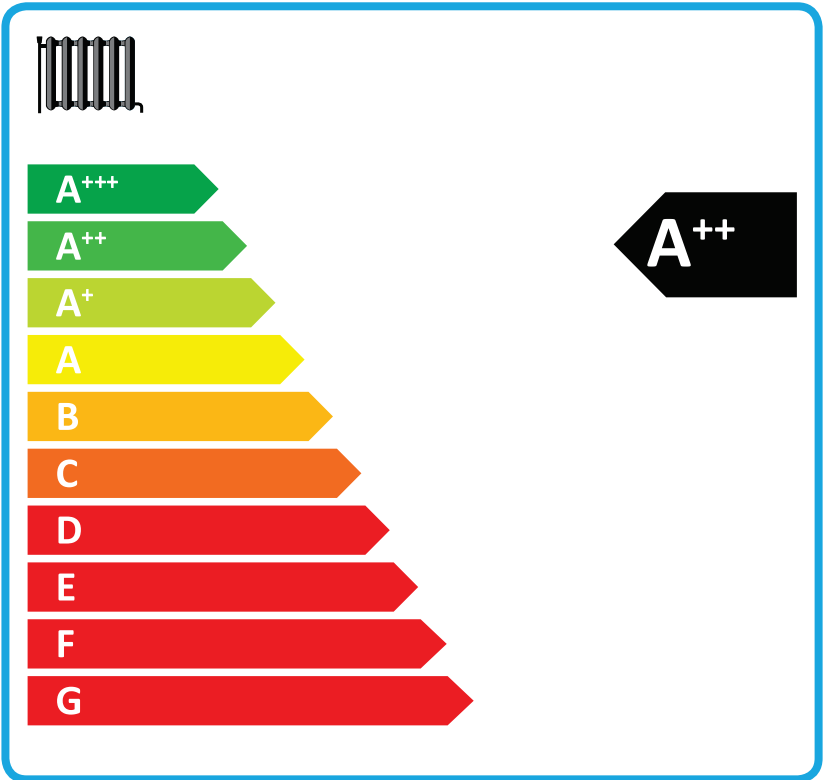+ 


+ 



Supplier's name:	NIBE		
Model:	NIBE F2040-16+ VVM 310		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A+++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	14,5	14,0	kW
Annual energy consumption for space heating, average climate	6702	8431	kWh
Annual electricity consumption for water heating, average climate	1702		kWh
Seasonal space heating energy efficiency, average climate:	176	134	%
Water heating energy efficiency, average climate:	98		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	15,0	16,0	kW
Rated heat output, warm climate:	15,0	15,0	kW
Annual energy consumption for space heating, cold climate	10040	13629	kWh
Annual electricity consumption for water heating, cold climate	1904		kWh
Annual energy consumption for space heating, warm climate	3370	4183	kWh
Annual electricity consumption for water heating, warm climate	1551		kWh
Seasonal space heating energy efficiency, cold climate:	144	113	%
Water heating energy efficiency, cold climate:	88		%
Seasonal space heating energy efficiency, warm climate:	235	189	%
Water heating energy efficiency, warm climate:	108		%
Sound power level LWA outdoors	61		dB

Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	180	138	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	148	117	%
Seasonal space heating energy efficiency of package, warm climate:	239	193	%

Model(s):				NIBE F2040-16+ VVM 310							
Type of heat source/sink:				Air-to-water							
Low-temperature heat pump:				No							
Equipped with supplementary heater:				Yes							
Heat pump combination heater:				Yes							
Climate condition:				Average							
Temperature application:				Medium temperature (55 °C)							
Applied standards: EN14825 and EN16147											
Rated heat output				Prated	14,0	kW		Seasonal space heating energy efficiency			
								η_s	134	%	
<i>Declared capacity for part load at outdoor temperature Tj</i>								<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>			
Tj = -7 °C	Pdh	12,5	kW		Tj = -7 °C	COPd	2,01	-			
Tj = +2 °C	Pdh	7,6	kW		Tj = +2 °C	COPd	3,29	-			
Tj = +7 °C	Pdh	4,9	kW		Tj = +7 °C	COPd	4,68	-			
Tj = +12 °C	Pdh	6,8	kW		Tj = +12 °C	COPd	6,51	-			
Tj = biv	Pdh	12,7	kW		Tj = biv	COPd	1,95	-			
Tj = TOL	Pdh	11,0	kW		Tj = TOL	COPd	1,95	-			
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW		Tj = -15 °C (if TOL < -20 °C)	COPd		-			
Bivalent temperature				T _{biv}	-7,6	°C		Operation limit temperature			
Cycling interval capacity for heating				P _{cyc}		kW		Cycling interval efficiency			
Degradation co-efficient				C _{dh}	0,98	-		Heating water operating limit			
								TOL	-10	°C	
								COP _{cyc}		-	
								WTOL	58	°C	
<i>Power consumption in modes other than active mode</i>								<i>Supplementary heater</i>			
Off mode				P _{OFF}	0,002	kW		Rated heat output			
Thermostat-off mode				P _{TO}	0,016	kW		P _{sup}			
Standby mode				P _{SB}	0,015	kW		3,0			
Crankcase heater mode				P _{CK}	0,035	kW		Type of energy input			
								Electric			
<i>Other items</i>											
Capacity control				variable				Rated air flow rate, outdoors			
									6000	m ³ /h	
Sound power level, indoors/outdoors				L _{WA}	35/61	dB		Rated water flow rate, indoor heat exchanger			
									1,21	m ³ /h	
Annual energy consumption				Q _{HE}	8431	kWh		Rated brine or water flow rate, outdoor heat exchanger			
										m ³ /h	
<i>For heat pump combination heater:</i>											
Declared load profile				XL				Water heating energy efficiency			
								η_{wh}			
								98			
								%			
Daily electricity consumption				Q _{elec}	7,75	kWh		Daily fuel consumption			
Annual electricity consumption				AEC	1702	kWh		Q _{fuel}			
								kWh			
								AFC			
								GJ			
Approved by:											
Contact details				© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden							